

IPv6 deployment for the IPv4 clueful



IPv6-Kongress, May 20 / 21, 2010

(updated slides from various presentations: PLNOG #3, Sept. 2009; LINX v6 Meeting, March 2009; SwiNOG #18 /#17/#16, 2009/2008)

Fredy Künzler, AS13030
kuenzler at init7 dot net

Init Seven AG
Elias-Canetti-Strasse 7
CH-8050 Zürich, Switzerland

www.init7.net
www.blogg.ch
www.bgp-and-beyond.com

Init Seven AG / Init7

- Internet Service Provider, based in Zurich / Switzerland
- privately owned company
- in Switzerland: mainly Business- and Wholesale Customers
- in Europe: MPLS and IP connectivity (full and partial table)
- own international dual-stacked v4 and v6 backbone (AS13030), mostly 10gig enabled (two rings: Zurich-Geneva-London-Amsterdam-Frankfurt-Zurich and Zurich-Basel-Frankfurt(2)-Zurich)
- connected to 20+ internet exchanges



IPv4 & IPv6 Statistics

v4 Addresses
295,013,920 ↓

v4 /8s Left
7% (18/256)

v6 Networks
6.3% (2,191/34,611)

v6 Ready TLDs
80% (228/283)

v6 Glue
2,402

v6 Domains
1,457,736 ↑

443
Days remaining

HURRICANE ELECTRIC
INTERNET SERVICES

Face facts:

Less than ~~500~~ **443** days until the free IPv4 pool gets exhausted.



IPv4 & IPv6 Statistics

v4 Addresses
295,013,920 ↓

v4 /8s Left
7% (18/256)

v6 Networks
6.3% (2,191/34,611)

v6 Ready TLDs
80% (228/283)

v6 Glue
2,402

v6 Domains
1,457,736 ↑


443

Days remaining

- Prediction by Geoff Huston, APNIC

<http://www.potaroo.net/tools/ipv4/>

The available / unassigned pool of IPv4 /8 blocks will be empty in 2011.

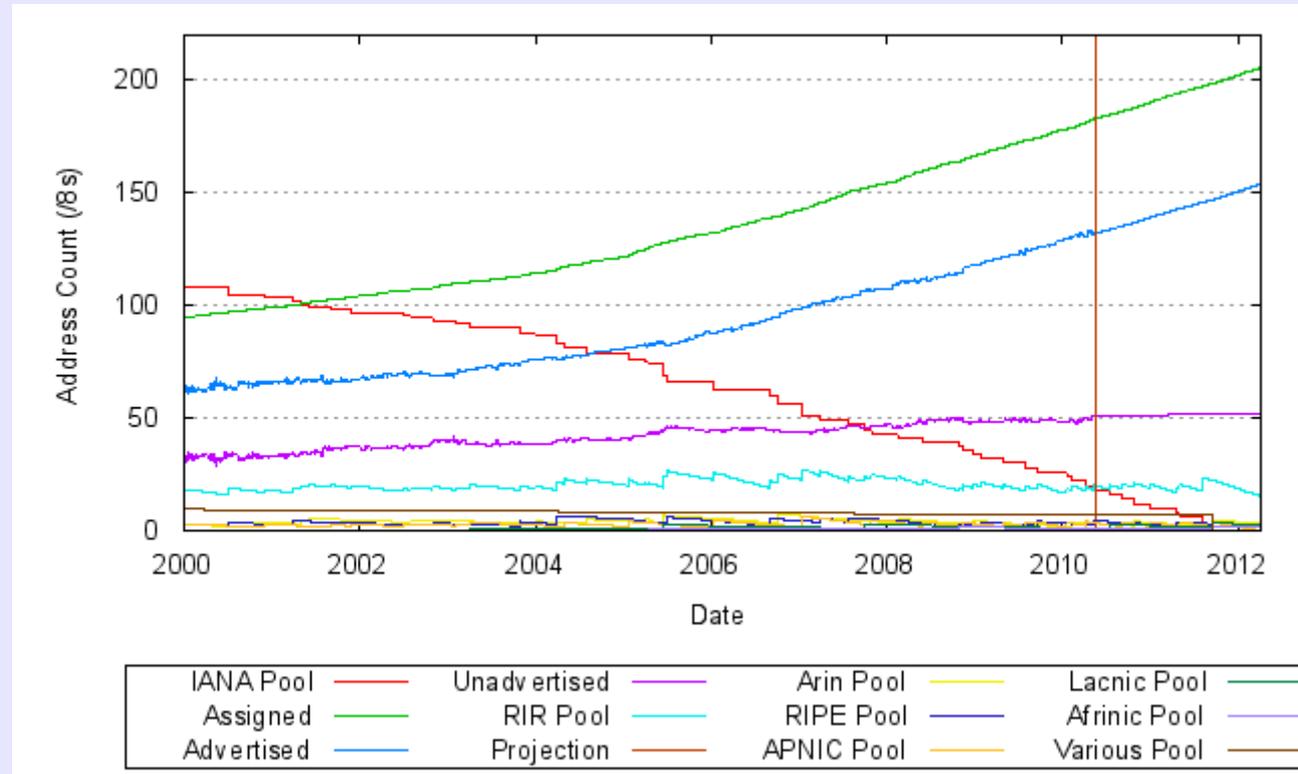



IPv4 & IPv6 Statistics

v4 Addresses
295,013,920 ↓

v4 /8s Left
7% (18/256)

v6 Networks
6.3% (2,191/34,611)

v6 Ready TLDs
80% (228/283)

v6 Glue
2,402

v6 Domains
1,457,736 ↑

443

Days remaining

Are you and your customers aware of the business continuity risk?

- Quoting Mike Leber, Hurricane Electric (he.net):

Do you have an IPv6 plan?

How long do you think it will be until Sarbanes Oxley and SAS 70 auditors [insert KPMG / PriceWaterhouseCoopers etc.] start requiring disclosure of IPv4 exhaustion as a business continuity risk, as well as the presence or lack thereof of an IPv6 plan?



IPv4 & IPv6 Statistics

v4 Addresses

295,013,920 ↓

v4 /8s Left

7% (18/256)

v6 Networks

6.3% (2,191/34,611)

v6 Ready TLDs

80% (228/283)

v6 Glue

2,402

v6 Domains

1,457,736 ↑

443

Days remaining

HURRICANE ELECTRIC
INTERNET SERVICES

Excuses – why people think they don't have to act now ...

- IDW - Informatik Services of the City of Winterthur:

<http://fetch.stadt.winterthur.ch/upload/politik/weisungen/W09032.pdf>

[...] Die Stadt Winterthur verfügt somit über genügend öffentliche und private IP-Adressen, weshalb sich für sie die erwähnte Verknappung von IPv4-Adressen relativiert. [...] Aktuell ist kein Handlungsbedarf vorhanden [...]

[...] The City of Winterthur has sufficient public and private IP addresses, which relativizes the aforementioned shortage of IPv4 addresses. [...] Currently there is no need for action [...]



IPv4 & IPv6 Statistics

v4 Addresses
295,013,920 ↓

v4 /8s Left
7% (18/256)

v6 Networks
6.3% (2,191/34,611)

v6 Ready TLDs
80% (228/283)

v6 Glue
2,402

v6 Domains
1,457,736 ↑

443
Days remaining

HURRICANE ELECTRIC
INTERNET SERVICES

Excuses – what people forget when they excuse their v6 ignorance:

- As soon as the first person (a citizen of your local city) gets only v6 connectivity due to v4 shortage, and is supposed to [fill in electronic tax form | vote electronically | access cultural activity calendar | etc.], then the local government is in trouble.
- think of thousands of other examples ...



The good news #1:

- If you are a LIR, request your IPv6 space now. It's just a formality:

<https://lirportal.ripe.net/>

-> Request Forms

-> IPv6 First Allocation Request Form



After receiving the IPv6 allocation, put the appropriate route object into the RIPE database.

The good news #2:

You don't have to reinvent the wheel. Everything you know about

- BGP4
- Subnet Masks
- OSPF
- Route-Maps, Prefix-lists, AS-Path, Filter-Lists is still valid. More or less.
- DualStack (IPv4/IPv6 on the same equipment) works well.
- Do not think of deploying IPv6-Tunnels ... unless you are an DSL/Cable enduser ... or a TIER-1 tunnel hustler ;-)

Initial IPv6 Deployment in a typical small provider network is less than 1 day of work.



IPv6 Address Plan #1:

- RIPE's allocation to the LIR is a /32
- Customer Assignments are usually a /48
(don't bother anymore how many addresses the customer should get)
- IPv4 /30 (PtP) becomes IPv6 /126
- Host Address (IPv4 /32) becomes IPv6 /128

Deploying an address plan:

- Stick to your existing IPv4 address scheme, for convenience.
- Use a /48 for loopbacks
- Use another /48 for Point-to-Point links

IPv6 Address Plan #2:

Remember the notation of IPv6:

2001:db8::/32 =


2001:0db8:0000:0000:0000:0000:0000:0000/32

- 0 are omitted
- two colons are replacing many 0

Note: 2001:db8::/32 should be used for any sample documentation.



IPv4 Sample Network (AS65000):

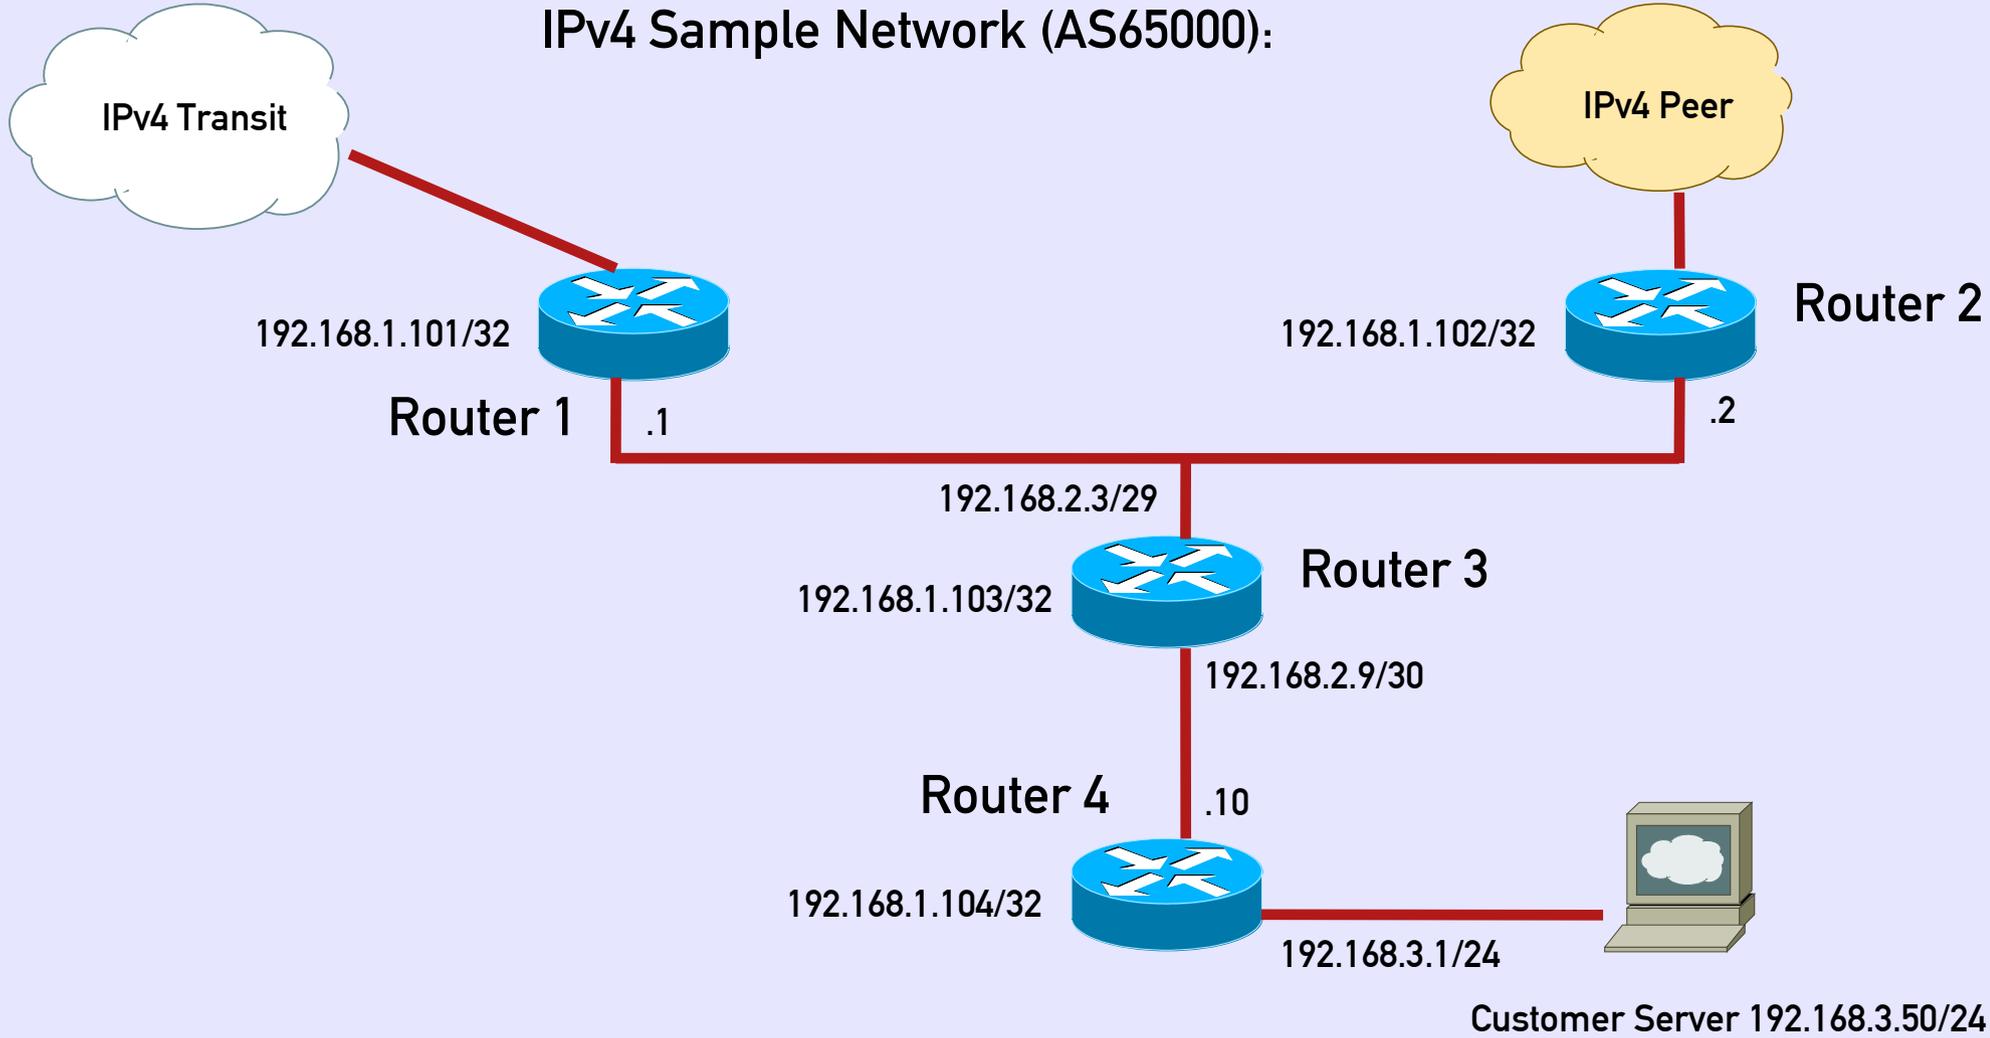




Migration to IPv6 #1

IPv6 Loopback (Host) Addresses.


We use 2001:db8:1::/48 for Loopbacks, and the last IPv4 octet corresponds to the IPv6 Loopback address.

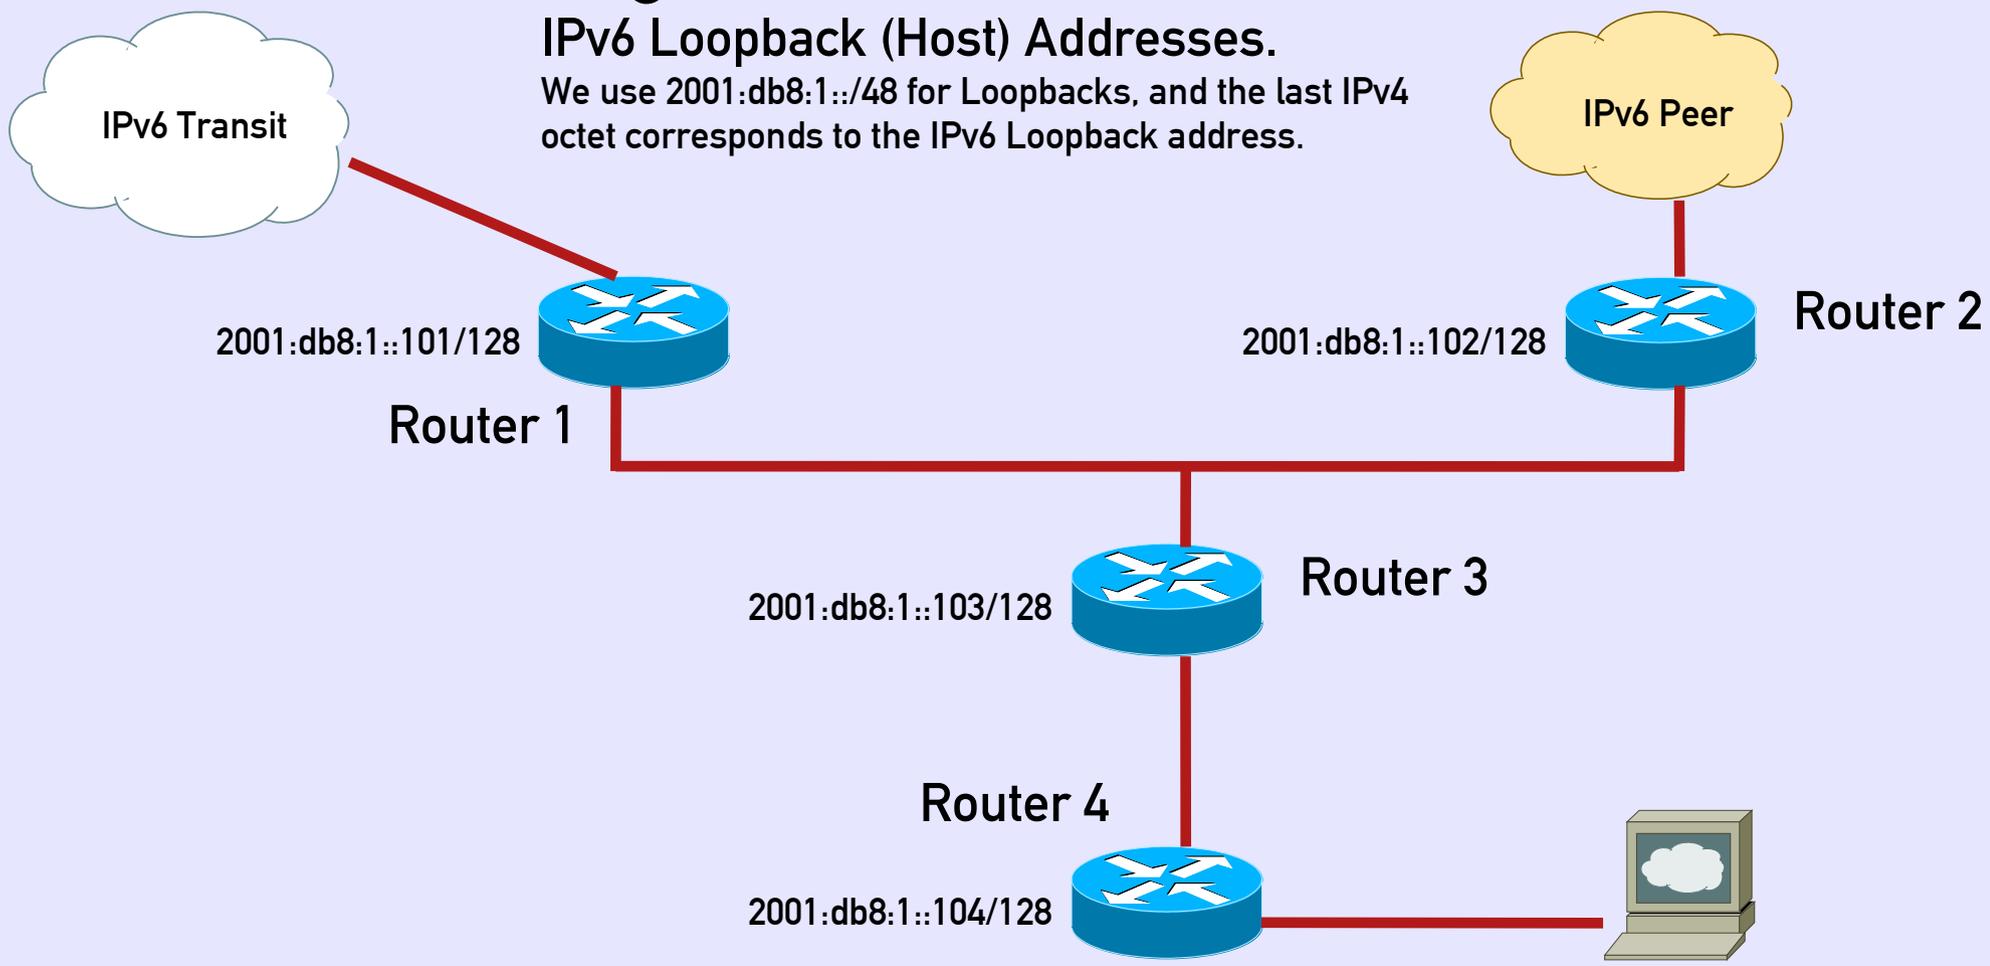

Migration to IPv6 #2

IPv6 PtP / LAN Addresses.

We use 2001:db8:2::/48 for LAN and PtP. Again, the addressing scheme corresponds to the legacy IPv4. PtP uses /126 addresses.

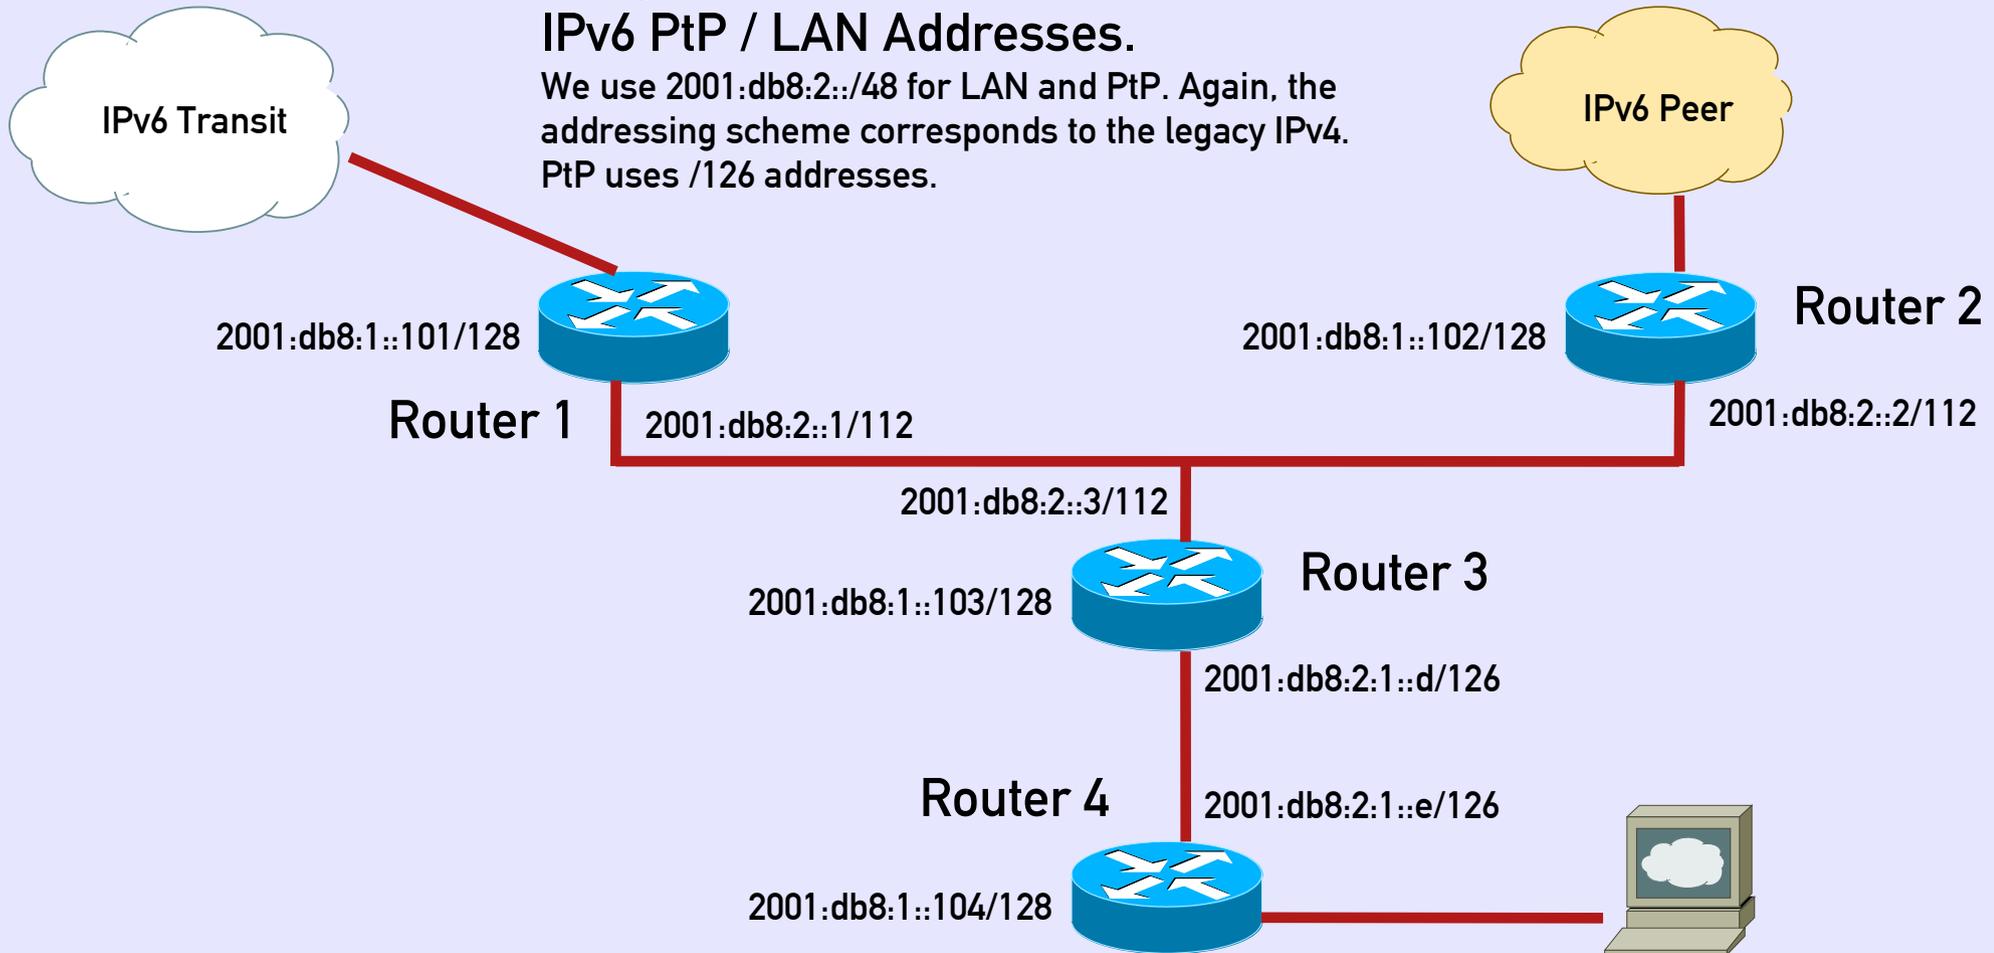




Migration to IPv6 #3

Server (End User) Addresses

Assign a /48 to every end user, Example 2001:db8:ab::/48

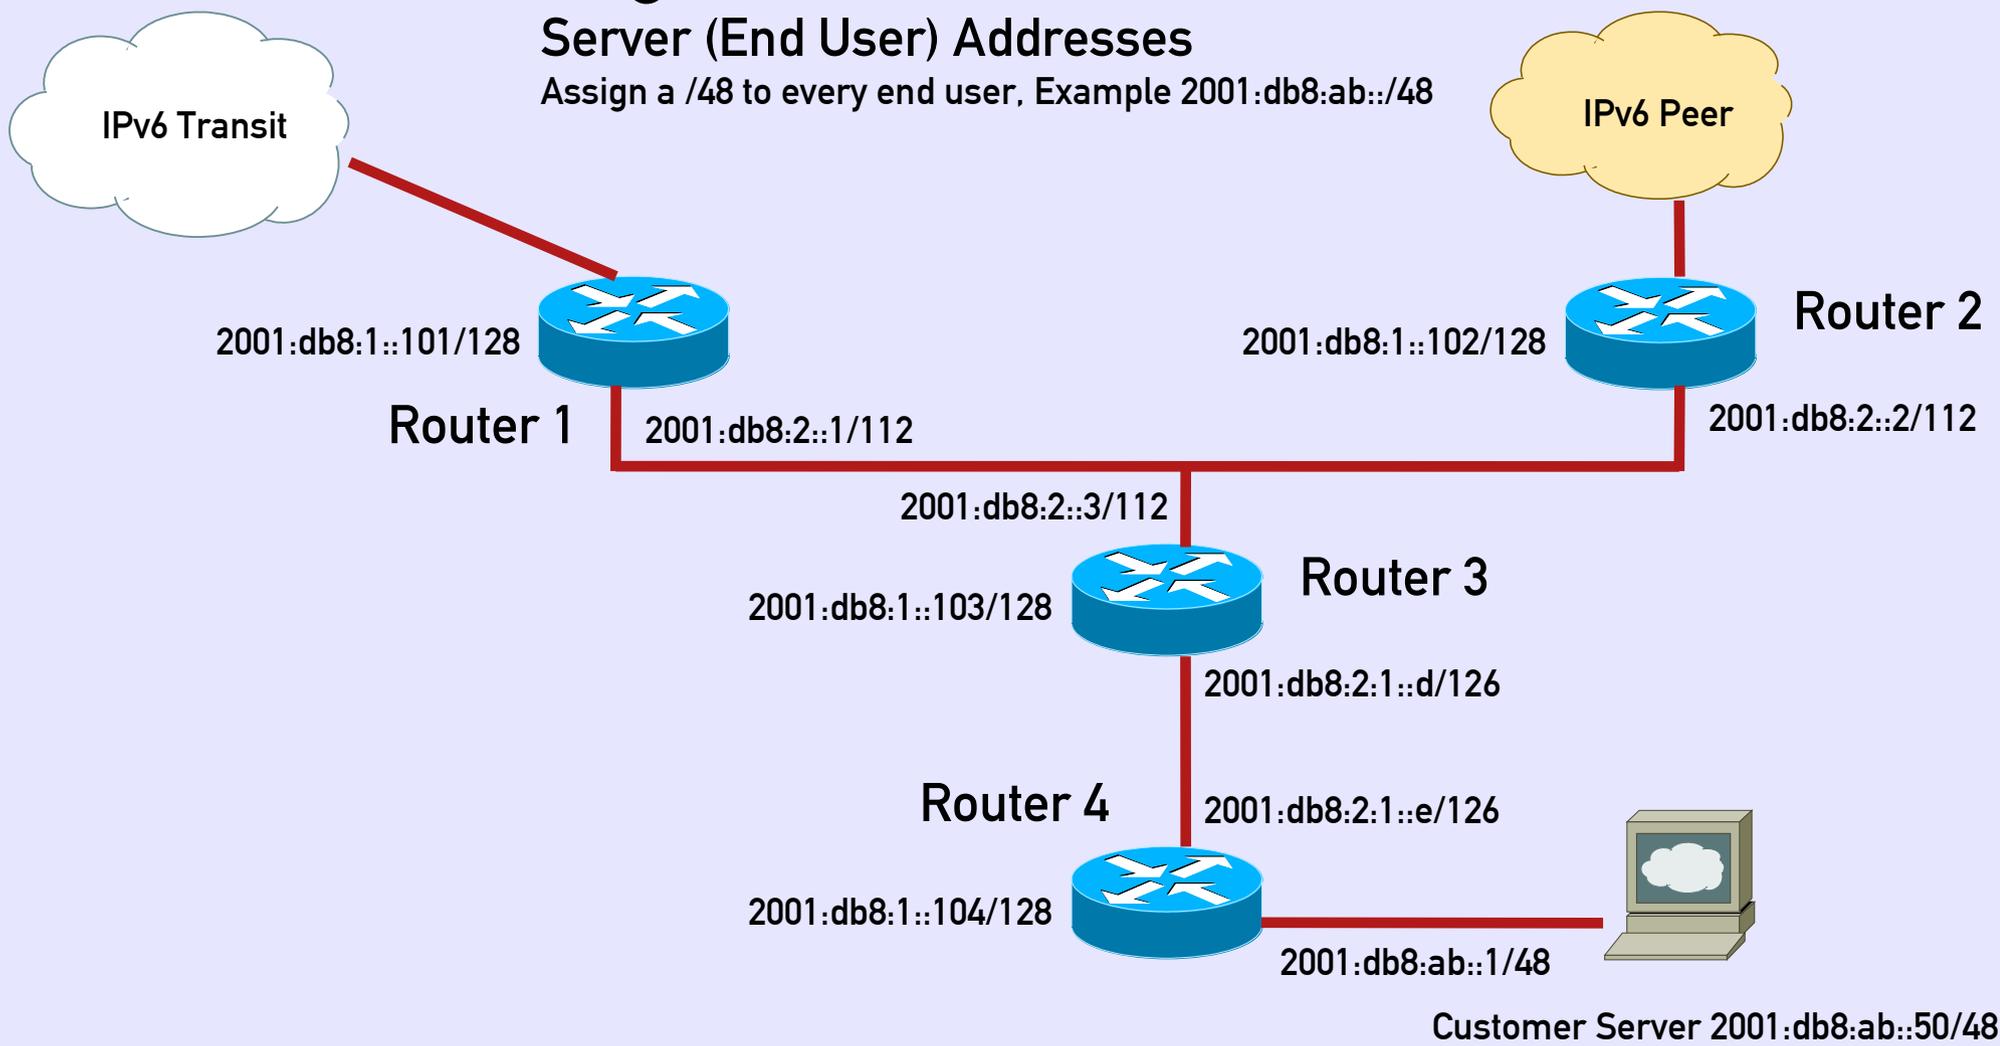



IPv6 Deployment #1:

Enable IPv6 on routers:

Cisco:

```
!  
ip cef    !required by ipv6 cef  
!  
ipv6 unicast-routing  
ipv6 cef  
!
```

Brocade (Foundry Networks):

```
!  
ipv6 enable-acl-cam-sharing  
ipv6 unicast-routing  
!
```



IPv6 Deployment #2:

Configure Interfaces:

Cisco:

```
!  
interface lo0  
ipv6 enable  
ipv6 address 2001:db8:1::101/128  
!
```

Brocade (Foundry Networks):

```
!  
interface lo 1  
ipv6 address 2001:db8:1::102/128  
ipv6 enable  
!
```



IPv6 Deployment #3:

Configure IPv6 OSPF:

Cisco:

```
!  
ipv6 router ospf 1  
  passive-interface default  
  no passive-interface x/y  
!  
interface x/y  
  ipv6 ospf 1 area 0  
!
```

Make sure that you are not talking OSPF to external interfaces (passive-interface default).



IPv6 Deployment #4:

Configure IPv6 OSPF:

Brocade (Foundry Networks):

```
!  
ipv6 router ospf 1  
  area 0  
!  
interface lo 1  
  ipv6 ospf enable  
  ipv6 ospf area 0  
!  
interface ethernet x/y  
  ipv6 ospf enable  
  ipv6 ospf area 0  
  ipv6 ospf passive !do not send OSPF multicast packets here  
!
```

IPv6 Deployment #5:

Check OSPF adjacencies and the IPv6 routing table:

Cisco:

```
# sh ipv6 ospf neighbor
```

```
# sh ipv6 route [ospf|connected|static]
```

Brocade (Foundry Networks):

```
# sh ipv6 ospf neighbor
```

```
# sh ipv6 route [ospf|connect|static]
```

IPv6 Deployment #6:

Configure IPv6 iBGP. Between Router 1/2/3 configure a full mesh, while Router 4 is configured as a route-reflector-client. All iBGP sessions should be configured between the loopback addresses (what else?).

Cisco / Brocade (Foundry Networks):

```
!  
router bgp 65000  
  neighbor 2001:db8:1::102 remote-as 65000  
  neighbor 2001:db8:1::102 description iBGP to Router 2  
  neighbor 2001:db8:1::102 update-source loopback 0  
  !  
  address-family ipv4 unicast  
  no neighbor 2001:db8:1::102 activate  
  !  
  address-family ipv6 unicast  
  neighbor 2001:db8:1::102 activate  
  neighbor 2001:db8:1::102 send-community  
  neighbor 2001:db8:1::102 next-hop-self      !depends on config.  
  Neighbor 2001:db8:1::102 soft-reconfiguration inbound  
  !
```

IPv6 Deployment #7:

Configure IPv6 eBGP Transit / Peers. Neighbor address is provided by Transit Provider or Internet Exchange.

Cisco / Brocade (Foundry Networks):

```
!  
ipv6 prefix-list MYSELF seq 5 permit 2001:db8::/32  
!  
router bgp 65000  
  neighbor x:x:x:x::x remote-as 123  
  neighbor x:x:x:x::x description IPv6 Transit Provider  
  !  
  address-family ipv4 unicast  
  no neighbor x:x:x:x::x activate  
  !  
  address-family ipv6 unicast  
  neighbor x:x:x:x::x activate  
  neighbor x:x:x:x::x send-community !depends on config  
  neighbor x:x:x:x::x next-hop-self !implicit  
  neighbor x:x:x:x::x soft-reconfiguration inbound  
  neighbor x:x:x:x::x prefix-list MYSELF out  
!
```



IPv6 Deployment #8:

Start propagating your IPv6 netblock. Advise your Transit Provider in order to adjust his inbound filter list. Don't forget the static route with high distance value...

Cisco / Brocade (Foundry Networks):

```
!  
ipv6 route 2001:db8::/32 null0 [distance] 250  
!  
router bgp 65000  
  network 2001:db8::/32  
!
```

Check your propagation in various IPv6 Looking Glass.

Linux Server / Apache 2

Configure your Linux Server with IPv6:

```
add into /etc/network/interfaces
```

```
#  
up ip -family inet6 address add 2001:db8:ab::50/48 dev eth0  
#
```

Reboot or restart network stack ... check connectivity with ping6.

Apache 1.x is not IPv6 compatible. If not done yet, migrate to Apache 2.

Good reading is Peter Bieringer's IPv6 Howto:

<http://www.bieringer.de/linux/IPv6/IPv6-HOWTO/>

For Apache 2 see section #4.

No default gateway anymore ...

Neighbor Discovery Protocol (ND) – no definition of the default gateway is required anymore. A router propagates himself as the Default Gateway to v6-Hosts [On by default]. Please turn it off at interfaces facing an Internet Exchange:

Cisco:

```
!  
interface lo0  
ipv6 enable  
ipv6 address 2001:db8:1::101/128  
ipv6 nd suppress-ra  
!
```

Brocade (Foundry Networks):

```
!  
interface lo 1  
ipv6 address 2001:db8:1::102/128  
ipv6 enable  
ipv6 nd suppress-ra  
!
```



DNS Server

Configure your DNS record with IPv6:

```
;
servername.com.      A           192.168.3.50
;
servername.com.      AAAA        2001:db8:ab::50
www                  CNAME       servername.com.
```

Note: DNS servers don't need to be accessible via IPv6 to resolve AAAA records, however IPv6-only clients may have problems to resolve.

IPv6 Reverse DNS Server

IPv6 Reverse DNS Zone Builder for BIND 8/9

<http://www.fpsn.net/index.cgi?pg=tools&tool=ipv6-inaddr>

```
;
; 2001:db8:abcd::/48
;
; Zone file built with the fpsn.net IPv6 Reverse DNS zone builder
; http://tools.fpsn.net/ipv6-inaddr
;
$TTL 3d; Default TTL (bind 8 needs this, bind 9 ignores it)
@      IN SOA d.c.b.a.8.b.d.0.1.0.0.2.ip6.int. noc.example.com. (
        200904010      ; Serial number (YYYYMMdd)
        24h            ; Refresh time
        30m           ; Retry time
        2d             ; Expire time
        3d             ; Default TTL (bind 8 ignores this, bind 9 needs it)
)

; Name server entries
IN     NS     ns1.example.com.
IN     NS     ns2.example.com.

; IPv6 PTR entries

; Subnet #1
$ORIGIN 0.0.0.0.d.c.b.a.8.b.d.0.1.0.0.2.ip6.int.

1.0.0.0.f.e.e.b.d.a.e.d.0.0.0.0      IN     PTR     gate.example.com.
2.0.0.0.f.e.e.b.d.a.e.d.0.0.0.0      IN     PTR     www.example.com.

;
; End of zone file.
; Thank you for using the fpsn.net IPv6 Reverse DNS zone builder
```



Check your IPv6 Connectivity

If you don't have an IPv6-enabled client, try the tools of SixXS:

<http://ipv4gate.sixxs.net/>

<http://www.sixxs.net/>

Some thoughts about v6 peering ...

We already see „Peering Wars“ in the IPv6 world, even though many responsible of larger networks think: „IPv6 is still a sandbox“.

Currently the IPv6 routing table contains ~2800 prefixes. Most larger v6 networks have some ~2700 to ~2900 prefixes (Source: route-views.linx.routeviews.org):

```
route-views.linx.routeviews.org> sh bgp su
BGP router identifier 195.66.225.222, local AS number 6447
893131 BGP AS-PATH entries
32762 BGP community entries
```

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
2001:7f8:4::b62:1	4	2914	1445986	195815	0	0	0	08w5d07h	2764
2001:7f8:4::cb9:1	4	3257	868006	195780	0	0	0	09w4d14h	2784
2001:7f8:4::d1c:1	4	3356	309667	99883	0	0	0	09w4d14h	2083
2001:7f8:4::1935:1	4	6453	383090	99893	0	0	0	08w5d09h	2647
2001:7f8:4::1a0b:1	4	6667	908512	195809	0	0	0	05w4d22h	2899
2001:7f8:4::1a6a:1	4	6762	3433	478	0	0	0	03:55:40	2688
2001:7f8:4::1b1b:1	4	6939	433222	99859	0	0	0	08w5d08h	2879
2001:7f8:4::32e6:1	4	13030	366955	99886	0	0	0	08w5d11h	2708

IPv6 peering considerations ...

Get your v6 peerings now! 50%+ of the routing table via peering can be achieved rather easy. If you happen to be also on DE-CIX, AMS-IX etc. success will be bigger ...


- ask Hurricane Electric (AS6939) (~1600+ prefixes)
- ask Init7 (AS13030) (~200+ prefixes)
- many other networks are still willing to peer openly IPv6
- transit some prefixes, convince your existing downstream customers to implement IPv6 – you may convince your potential peers if you're not carrying just one prefix ...
- and last but not least: get one or more decent v6 transits

- Lesson from the v4 peering history: „old“ ASNs have many legacy peers, despite of today's size of the network



„90% of the v6 traffic is PING!“


Not true!

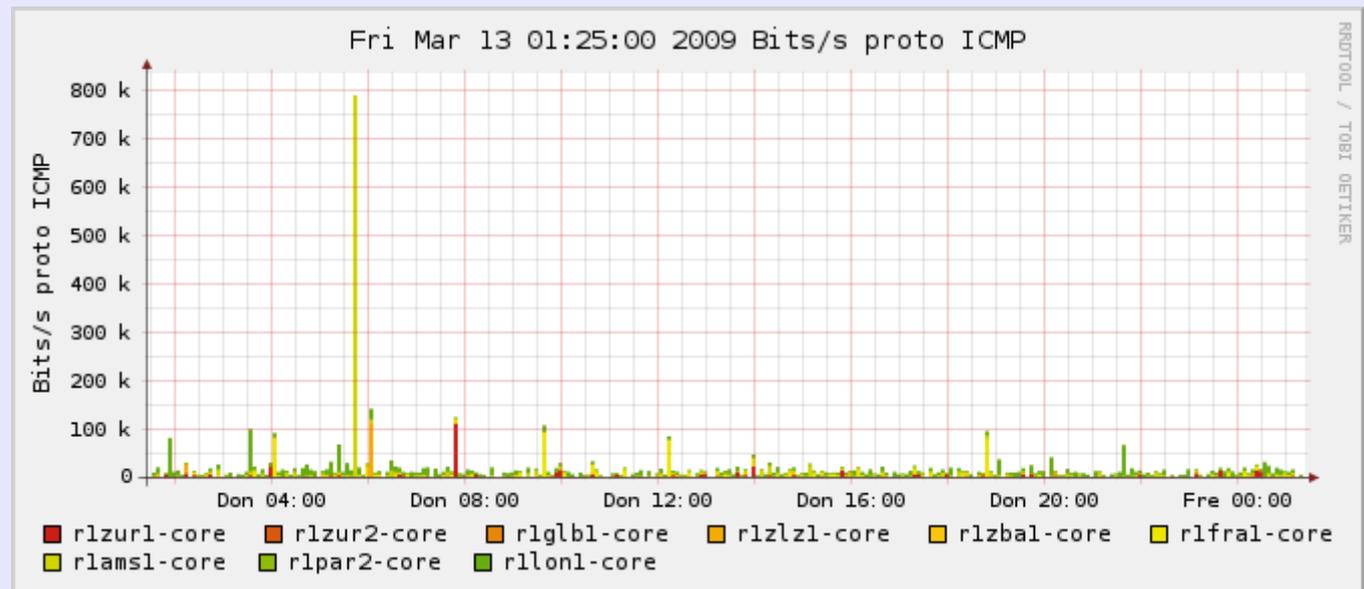



Yes, there is real IPv6 Traffic!

Up to 100 mbps on the edges of the Init7 network:

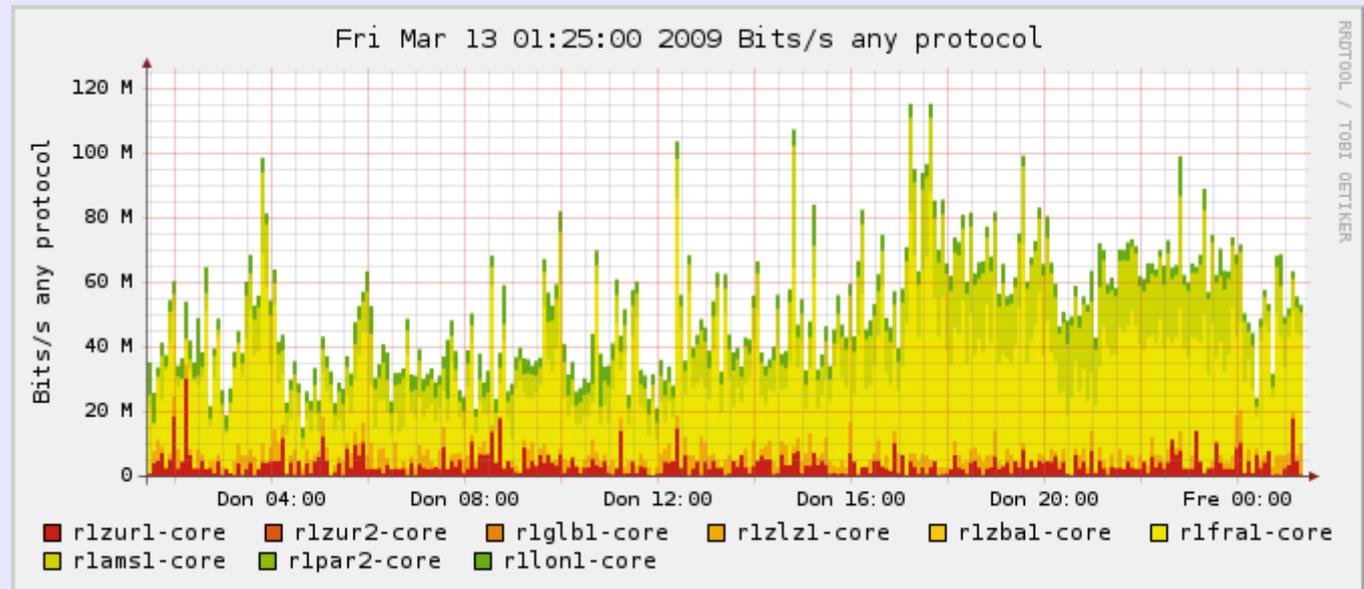



Some IPv6 Links:

Tunnelbrokers (IPv6 for IPv4-only broadband users):

- <http://tunnelbroker.net/> (by Hurricane Electric)
- <http://www.sixxs.net/faq/account/?faq=10steps>

From RIPE #56

- Structural Problems in the IPv6 Routing:

http://www.ripe.net/ripe/meetings/ripe-56/presentations/Schmidt-Structural_problems_IPv6_routing.pdf

- Measurement of the IPv6 deployment by Geoff Huston:

http://www.ripe.net/ripe/meetings/ripe-56/presentations/Huston-Measuring_IPv6_Deployment.pdf

- IPv6 BOGON information (use the “Relaxed” template):

<http://www.space.net/~gert/RIPE/ipv6-filters.html>



History of IPv6 @ SwiNOG

- SwiNOG #2 (March 21, 2001) by Simon Leinen, SWITCH:
IPv6 Operational Experiences

<http://www.swinog.ch/meetings/swinog2/leinen-ipv6.ps>

- SwiNOG #8 (March 24, 2004) by Simon Leinen, SWITCH:
IPv6 Peering Group

http://www.swinog.ch/meetings/swinog8/ipv6_swinog.pdf

- SwiNOG #11 (October 20, 2005) by Jeroen Massar
SixXS: Looking at deploying IPv6

<http://www.swinog.ch/meetings/swinog11/SwiNOG11-DeployingIPv6.pdf>

Help to deploy IPv6 in Europe!

- Obtain your IPv6 allocation now
- Init7 offers IPv6 connectivity to all existing Colo/Transit customers free of charge according to their current CDR (BGP4 feed or static routing).
- Init7 offers IPv6 transit connectivity to non-customers (BGP4 feed only) free of charge until end of 2010 (Cabling on prospects expense).
- ~~DSL/Cable customers: no decent IPv6 CPE devices available yet, use Tunnelbrokers until further notice. Blame ... | Fritz | Zyxel | Netopia | ... |~~ yes, there is now some effort by CPE vendors. Especially Fritz (AVM) has devices with native IPv6 support.





Largest v6 countries:

(Source: <http://bgpmon.net/weathermap.php?inet=6>)

Prefixes per country

the number represent the number of unique prefixes found in the routing table

1		United States	800
2		Germany	216
3		Australia	139
4		United Kingdom	129
5		Netherlands	129
6		Canada	126
7		Japan	116
8		Indonesia	98
9		Russian Federation	94
10		Italy	85
11		France	79
12		EU	73
13		Korea, Republic of	66
14		Switzerland	63
15		Sweden	61
16		Poland	57
17		China	54
18		New Zealand	54
19		Austria	51
20		Czech Republic	48
21		Brazil	46
22		Hong Kong	44
23		Finland	35
24		Taiwan, Province of China	32

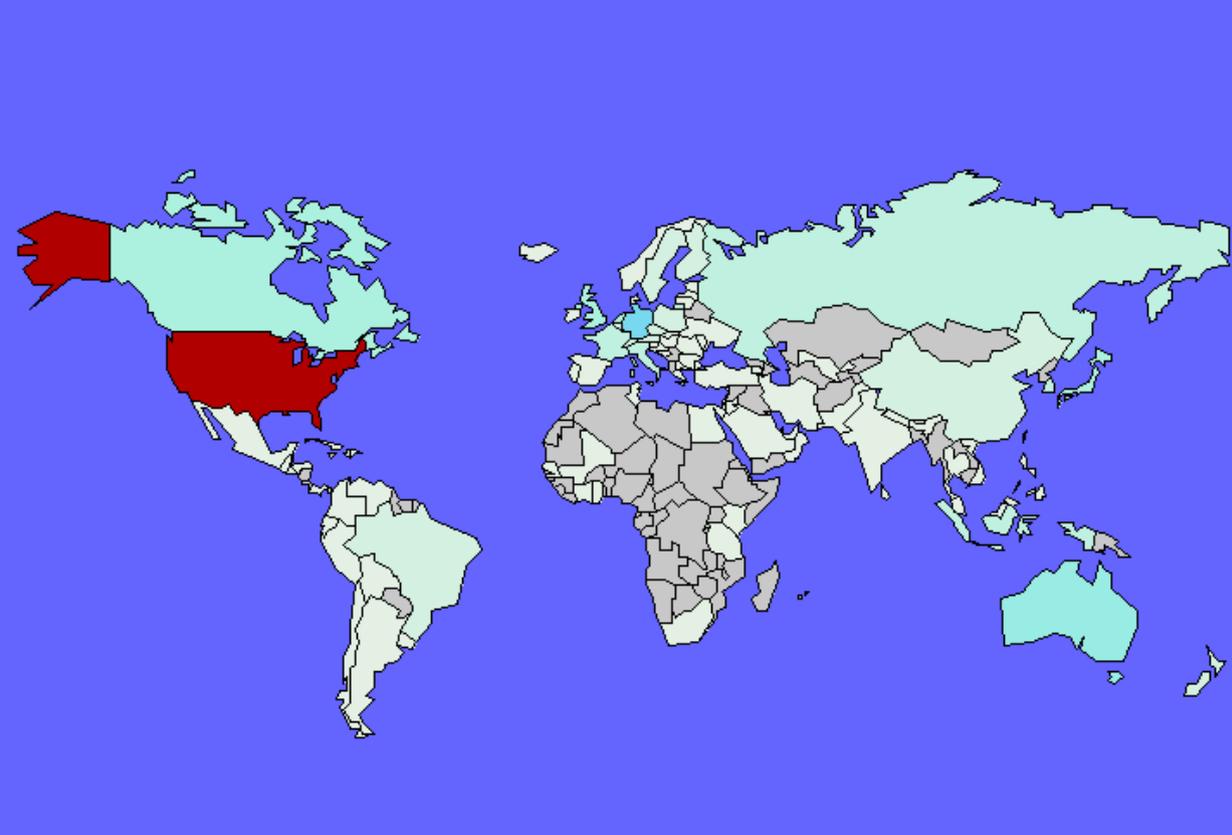



Largest v6 backbones:

(Source: <http://bgpmon.net/weathermap.php?inet=6>)

Top 25 Transit/Upstream AS numbers in the routing table based on OriginAS

This represents the number of distinct number of originAS's for which these AS's provide transit (i.e. are seen as upstream AS)

Transit/Upstream AS number	AS description	number of AS's for which this AS is providing Transit
AS6939	HURRICANE - Hurricane Electric, Inc.	750
AS3257	TINET-BACKBONE Tinet SpA	275
AS13030	INIT7 Init Seven AG, Zurich, Switzerland	196
AS2914	NTT-COMMUNICATIONS-2914 - NTT America, Inc.	192
AS3549	GBLX Global Crossing Ltd.	168
AS6453	GLOBEINTERNET TATA Communications	92
AS3356	LEVEL3 Level 3 Communications	87
AS1299	TELIANET TeliaNet Global Network	77
AS174	COGENT Cogent/PSI	74
AS6175	SPRINTLINK9	57
AS30071	ASN-TBONE - TowardEX Technologies International, Inc.	55
AS286	KPN KPN Internet Backbone	39
AS1257	TELE2	37
AS13237	LAMB DANET-AS European Backbone of LambdaNet	35
AS20965	GEANT The GEANT IP Service	33
AS9002	RETN-AS ReTN.net Autonomous System	32
AS12859	NL-BIT BIT BV	31
AS4826	VOCUS-BACKBONE-AS Vocus Connect International Backbone	29
AS2497	IIJ Internet Initiative Japan Inc.	27
AS11537	ABILENE - Internet2	26
AS6762	SEABONE-NET Telecom Italia Sparkle	25
AS10026	PACNET Pacnet Services (Japan) Corp.	24
AS1273	CW Cable and Wireless plc	19
AS8928	INTERROUTE Interoute Communications Ltd	19
AS4436	AS-NLAYER - nLayer Communications, Inc.	17

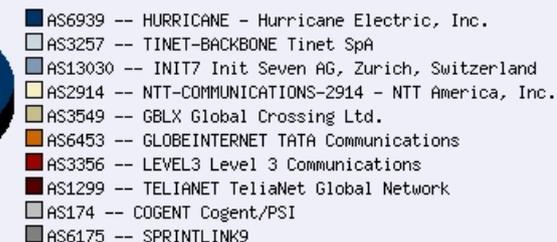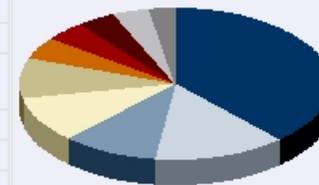




IPv6. Now!

Questions?

Fredy Künzler, AS13030
kuenzler at init7 dot net

www.init7.net
www.blogg.ch
www.bgp-and-beyond.com

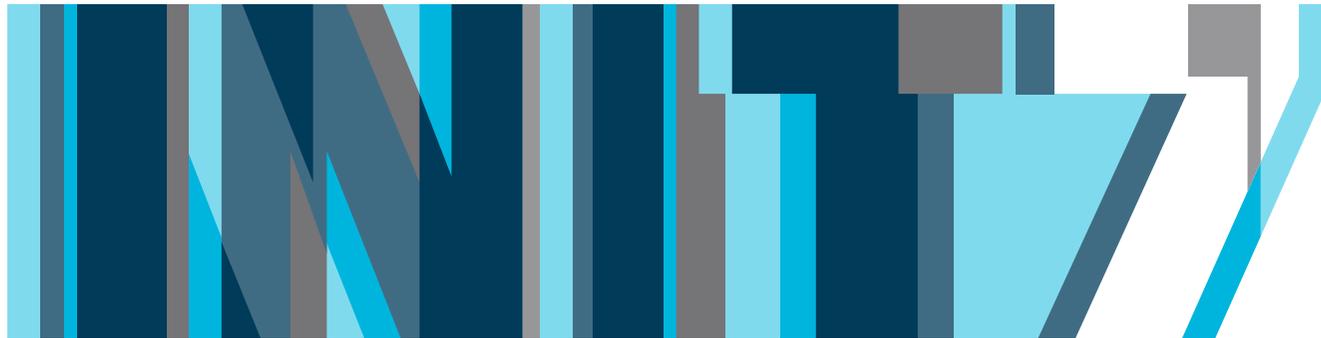

Init7 & IPv6



Vortrag zum Memberanlass Mai 2012



1 Das Unternehmen Init7



Struktur der Init7 Holding mit klarem Fokus auf drei Kernkompetenzen

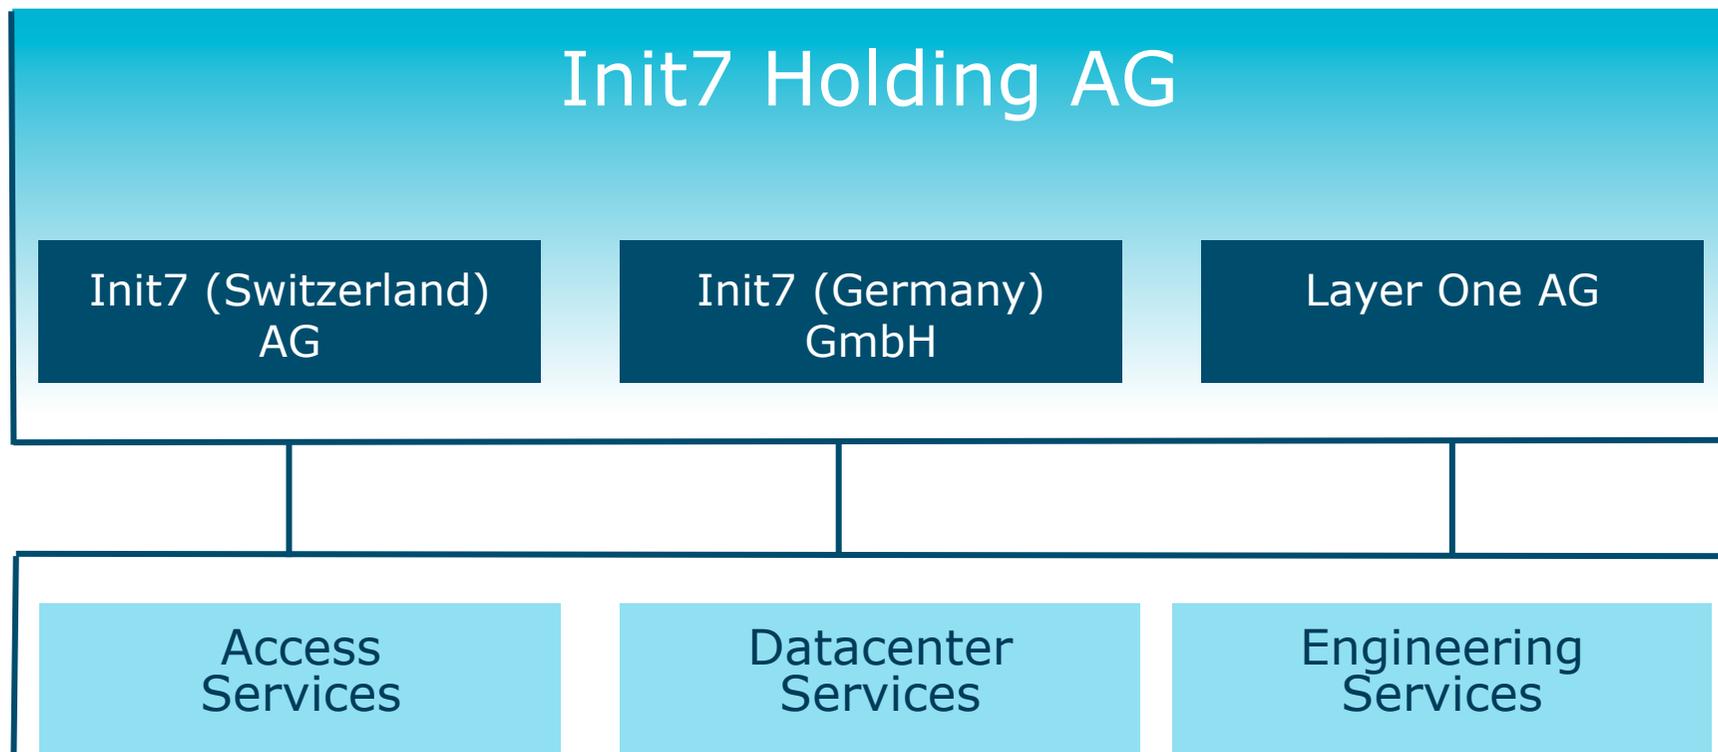


Init7 betreibt einen eigenen internationalen Backbone mit der AS Nummer 13030

Facts



- Init7 betreibt den **internationalen n*10Gbit IP Backbone** mit der AS-Nummer 13030 (Autonomes System)
- Das AS13030 ist an rund **20 Internet Exchange Points** angeschlossen
- Fast 1000 weitere Netze sind sogenannte Peering-Partner, was bedeutet, dass mit all diesen Netzen direkte Interkonnektionen bestehen
- Dies ermöglicht es uns, ca. **60% der globalen Routing-Tabelle** direkt zu erreichen und damit optimale Konnektivität, Latenz, Durchsatz und Erreichbarkeit sicherzustellen
- Die übrigen ca. 40% der Ziele sind über **global verteilte Upstreams** angebunden

Vorteile


- **Volle Kontrolle** über Qualität unseres IP Transit Services
- **Unabhängigkeit** von Lieferanten




Init7 Backbone Schweiz

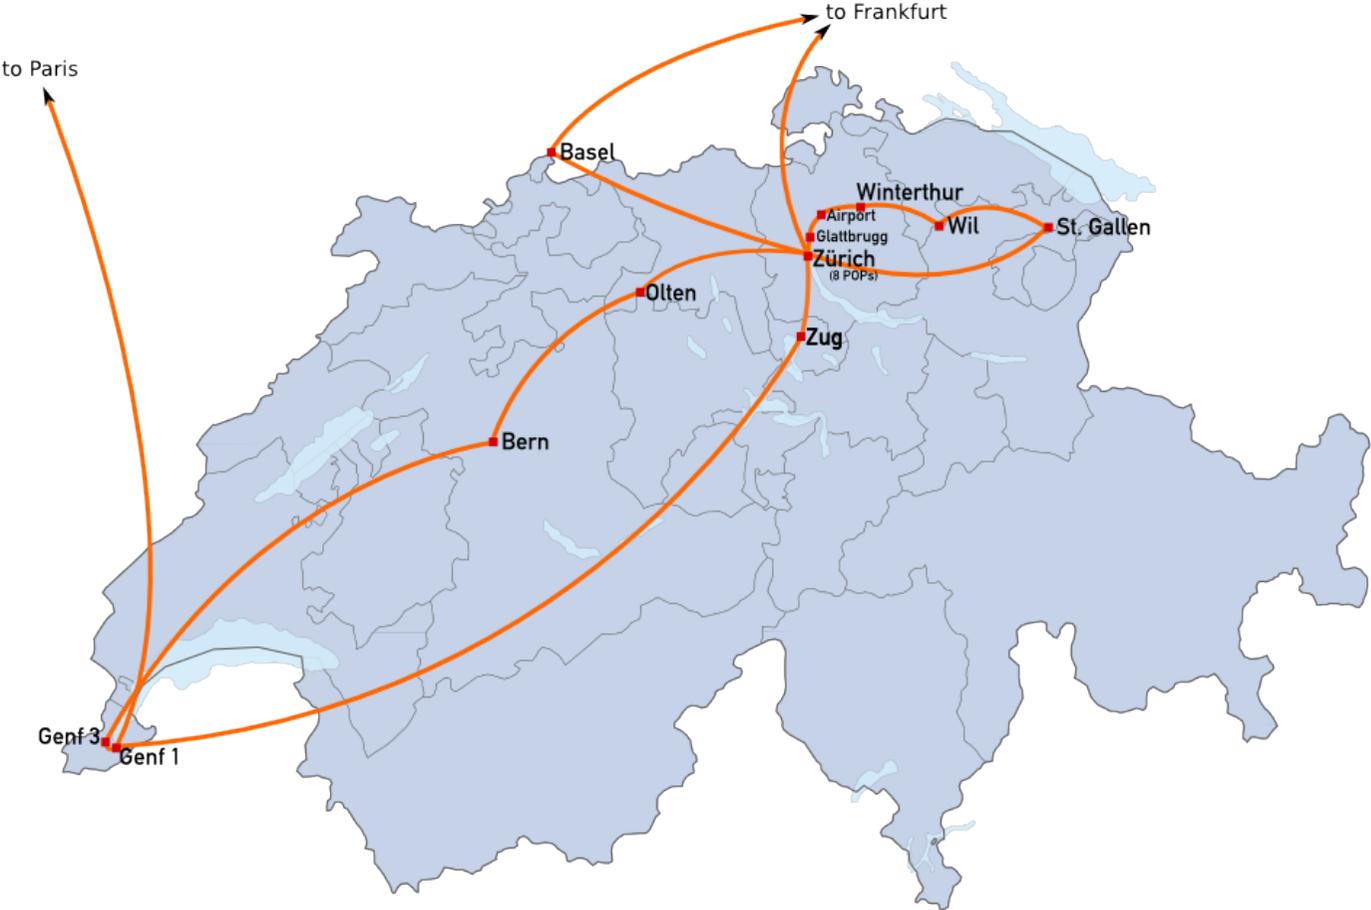

Init7 Backbone Europa



Init7 Backbone USA



Unsere Kunden: Eine kleine Auswahl grosser Namen

ZATTOO

 **Akamai**


FLUGHAFEN ZÜRICH

comparis.ch

 **HOSTPOINT**
THE DATA RESIDENCE

HETZNER
ONLINE


SRG SSR



2 **Init7**: native IPv6 in einer Dualstack-Umgebung

Folgen einer Verzögerung der IPv6-Implementation: das Internet auf zu wachsen

- Der Übergang der Internet-Infrastruktur zu IPv6 ist unumgänglich – heute, 2012, kann diese Erkenntnis wohl als **unumstößlicher Allgemeinplatz** angesehen werden
- Gebetsmühlenartig werben internationale Organisation wie das **Swiss IPv6 Council** aber auch die OECD für eine zügige Implementation
- Warnung vor den fatalen **Folgen** einer Zukunft ohne IPv6: Das Internet – und damit das Rückgrat der globalen Wirtschaft und Fundament egalitären Zugangs zu Bildung, Informationen und sozialem, grenzüberschreitendem Austausch – **würde schlichtweg aufhören zu wachsen**




Das IPv6 Henne-Ei-Dilemma: „Niemand benutzt IPv6, weil niemand IPv6 benutzt“¹

Die **Hersteller** von Hard- und Software entwickeln ihre Produkte vorrangig nach der Nachfrage im Markt (v.a. der ISPs)

In der Konsequenz verwenden die **End-Nutzer** kein IPv6, weil sie es meist von ihren Providern gar nicht geboten bekommen




Während viele **Marktteilnehmer** nicht bereit waren, für neue, unausgereifte Produkte Geld auszugeben, da die alten Systeme problemlos arbeiten



Wirtschaftliche Aspekte beeinflussen die IPv6 Implementation negativ

- Um wie Init7 als Early Adopter IPv6 zu implementieren, bedarf es einer großen Portion **Idealismus, Enthusiasmus und Risikofreudigkeit**
- IPv6 ist für die meisten Kunden ein „Add-On“, Kunden zeigen wenig Eigeninitiative und Interesse
- **Kein Businesscase für ISPs:** Jeder Serviceprovider, der IPv6 implementiert und ihn als kostenlosen Service seinen Kunden zur Verfügung stellt, generiert **primär Aufwand**, ohne jedoch **einen monetären Vorteil** zu erreichen

IPv6 ist eine zwingend notwendige Innovation – aber ohne Advokaten: „**The IPv6 Internet lacks a fully connected mesh of "Tier-1" providers**". Es mangelte an einflussreichen Vordenkern und v.a. VorMACHERN, die jenseits wirtschaftlicher Vor- und Nachteile den Weg aus Teufelskreis und Dilemma anführt.



Init7 als Vordenker & Vormacher

- 2008 begann Init7 mit <20 Mitarbeitern, natives IPv6 zu implementieren


Heute:

- Internationaler dualstack Backbone
- Kostenfreies IPv6 für IP-Transit, Colocation-Bundles und sogar xDSL Kunden

Und vor allem...

- ...begannt Init7 die eigenen Erfahrungen aus der praktische Implementation von IPv6 in **der Community zu predigen**

(u.a.: PLNOG 3 (Sep. 2009); LINX v6 Meeting (März 2009); SwiNOG 18, 17 und 16 (2008-2009); DENOG 2 (Nov. 2010); SWInog 21 (Nov. 2011); RIPE 61 (NOV. 2010) u.v.m.)




Dieser rastlose missionarische Einsatz für IPv6 zahlte sich aus (1/2)


Renseys identifizierte Init7 2011 als globaler Top-10 IPv6-Provider mit dem weltweit drittgrößten Wachstum an IPv6 Kunden:





Dieser rastlose missionarische Einsatz für IPv6 zahlte sich aus (2/2)

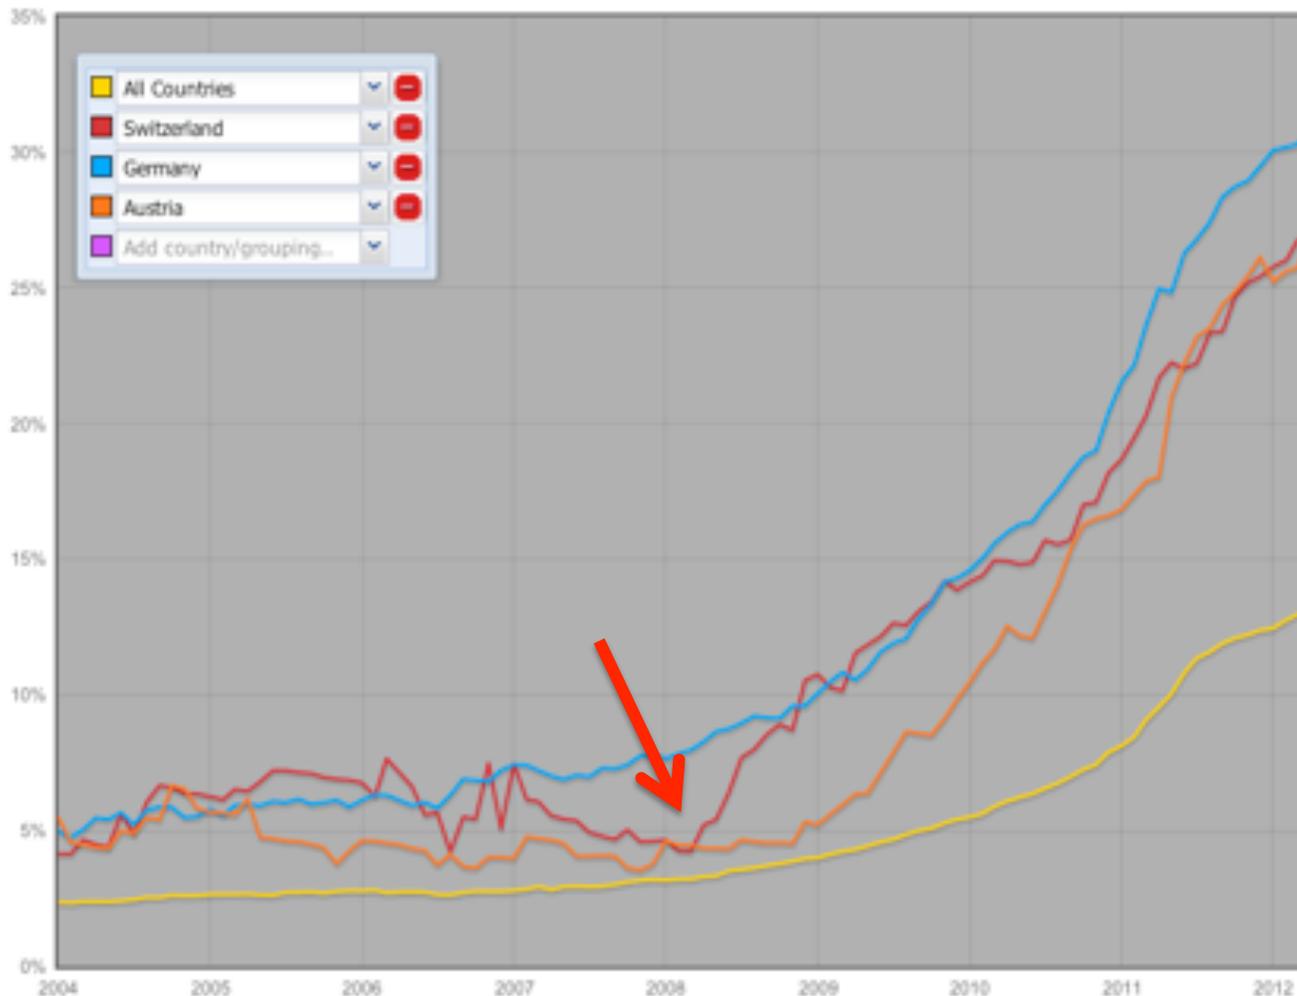

Bereits viel früher sind im nationalen Rahmen Effekte der Aufklärungsarbeit durch Init7 spürbar: In der Schweiz ist Ende Q1 2008 ein deutlicher, **sprunghafter Anstieg** der Netzwerke (AS), die IPv6 announce, zu verzeichnen. Die Dokumentation der RIPE zeigt dies deutlich.



Aktueller IPv6 Traffic AS13030

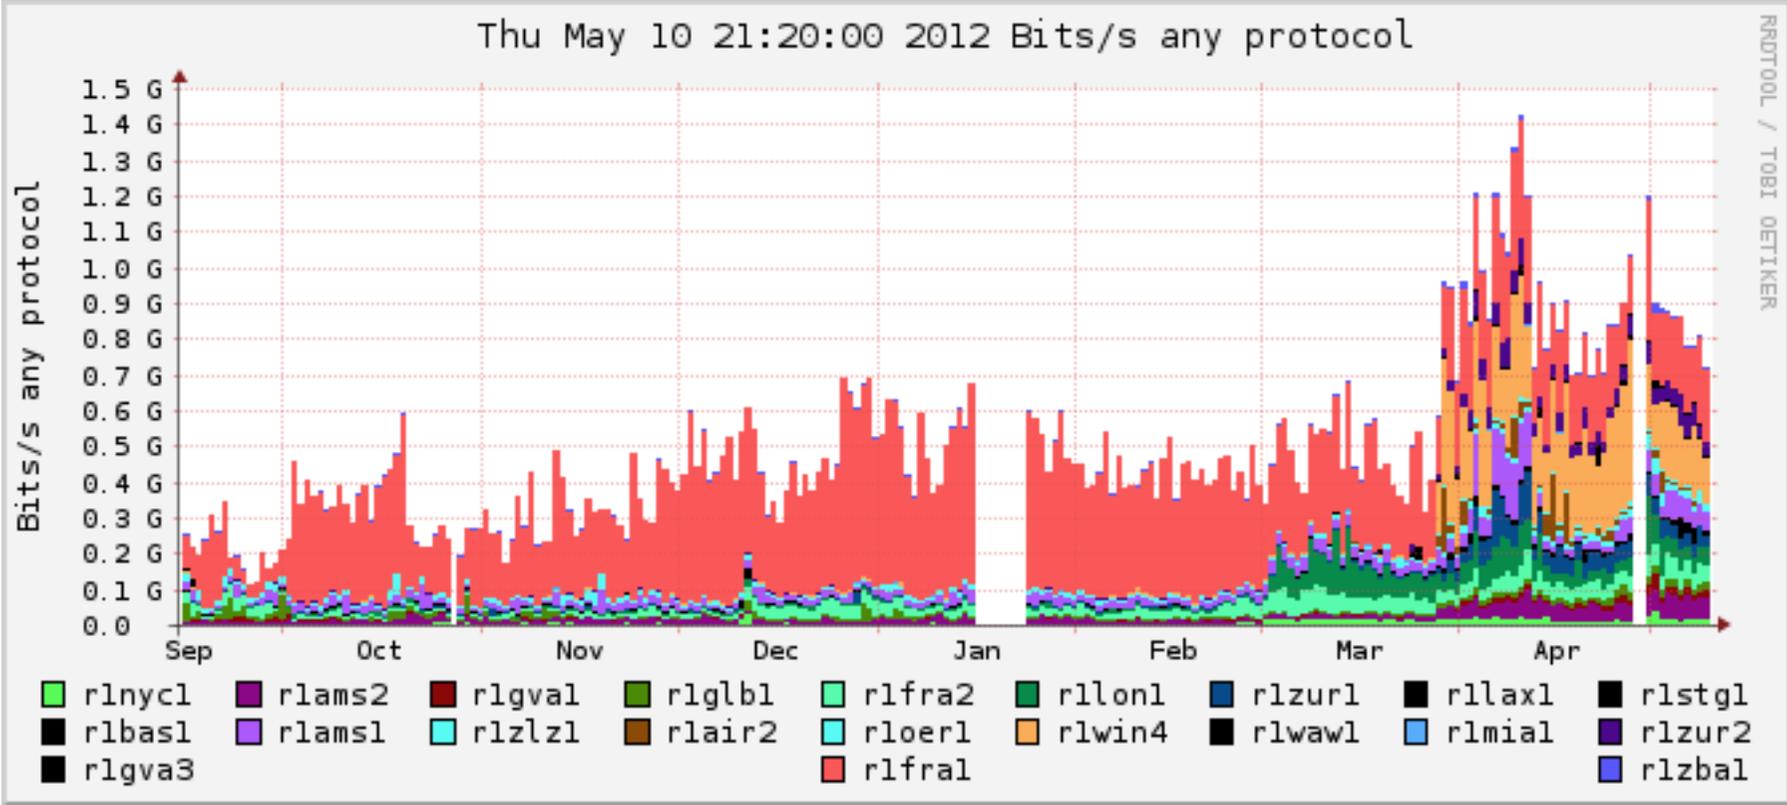


Ergebnisse Besucher-Befragung zur WLAN Nutzung am Flughafen Zürich - Summary


Das IPv6 Deployment von Init7 ist also ganz klar getrieben von Engineering und Network Architecture. Dieser praktische Ansatz war für den Erfolg enorm wichtig und hat vielen anderen Network Engineers die Angst vor IPv6 genommen.

```
Router (config) #ipv6 enable
```

...heisst das Zauberwort, der Rest wird sich dann schon irgendwie ergeben.



Kontakt

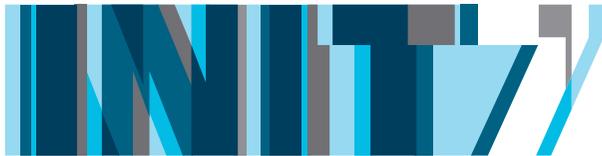


Emanuel Kleindienst

kleindienst@init7.net
<http://www.init7.net/>

Init7 (Switzerland) AG
Elias-Canetti-Strasse 7
CH-8050 Zürich

phone: +41 44 315 44 00
fax: +41 44 315 44 01

Folgen Sie uns auf Twitter:
<http://twitter.com/init7>



COPYRIGHT

Alle in dieser Dokumentation enthaltenen Strategien, Modelle, Konzepte, Ideen, Berechnungen und Schlussfolgerungen sind ausschliessliches geistiges Eigentum (Ausnahme: Quellenangaben) der Init7 (Switzerland) AG und urheberrechtlich geschützt. Sie werden dem Auftraggeber zu dessen ausschliesslicher Nutzung zeitlich unbefristet überlassen. Alle hierin enthaltenen Informationen unterliegen der Geheimhaltung und sind nur für den Auftraggeber bestimmt. Der Auftraggeber ist nicht berechtigt, diese Dokumentation zu verändern oder außerhalb seines Unternehmens zu veröffentlichen oder zu verbreiten. Diese Bestimmung kann ausschliesslich mit schriftlicher Zustimmung der Init7 (Switzerland) AG abgeändert oder widerrufen werden. Mündliche Vereinbarungen besitzen keine Gültigkeit.

DISCLAIMER

Die Init Seven AG übernimmt keinerlei Gewähr für die Aktualität, Korrektheit, Vollständigkeit oder Qualität der bereitgestellten Informationen. Haftungsansprüche gegen die Init7 (Switzerland) AG, welche sich auf Schäden materieller oder ideeller Art beziehen, die durch die Nutzung oder Nichtnutzung der dargebotenen Informationen bzw. durch die Nutzung fehlerhafter und unvollständiger Informationen verursacht wurden sind grundsätzlich ausgeschlossen, sofern seitens des Autors kein nachweislich vorsätzliches oder grob fahrlässiges Verschulden vorliegt.

Alle Angebote sind freibleibend und unverbindlich. Die Init7 (Switzerland) AG behält es sich ausdrücklich vor, Teile des Angebots oder das gesamte Angebot ohne gesonderte Ankündigung zu verändern, zu ergänzen, zu löschen oder die Veröffentlichung zeitweise oder endgültig einzustellen.

